

CIRCUIT SELECTOR VALVE SERIES VOR

**METAL
WORK**[®]
P N E U M A T I C


Circuit selector valves select two separate input signal without creating reciprocal interference, giving a single output signal.



TECHNICAL DATA		1/8"		1/4"	
		Nominal flow rate at 6.3 bar ΔP 1 bar		Nominal flow rate at 6.3 bar ΔP 1 bar	
Nominal flow rate at 6.3 bar ΔP 1 bar	NI/min	500		1300	
Operating temperature range	°C	-10 to + 80			
	°F	14 to 176			
Operating pressure	bar	2 - 10			
	MPa	0.2 - 1			
Fluid		Lubricated or unlubricated filtered air			

COMPONENTS

- ① Body: passivated aluminium
- ② Insert: brass
- ③ Seal: NBR
- ④ Ball: stainless steel

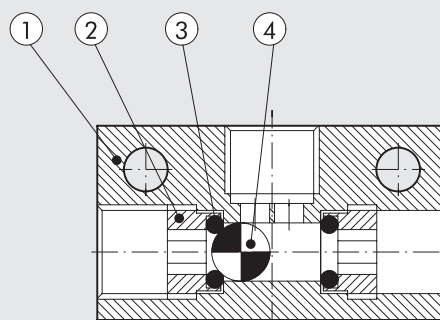

DIMENSIONS AND ORDERING CODES

Code	Description	A	C	G	H	E	B	F	Ø
W3603000001	VOR 1/8	36	20	15	7.5	4	25	G 1/8	4.5
W3603000002	VOR 1/4	43	25	20	8.5	6.5	25	G 1/4	4.5

