


Vacuum Units VH-OG Start

Suction rate 10, 21, 40, 63 and 100 m³/h



Vacuum Units VH-OG Start

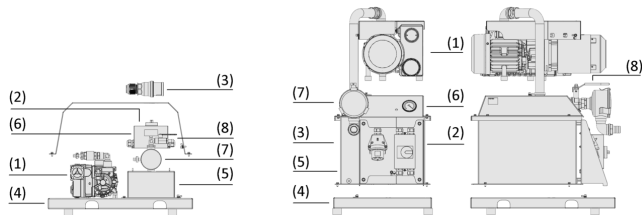

System design Vacuum Units VH-OG Start

Product highlights

- Oil-lubricated pump for vibration-free operation and continuous delivery of suction air with maximum vacuum to 98 %
- Vacuum reservoir keeps the workpiece safe in the event of a brief power failure
- Complete solution ready-to-connect for immediate use without any further installation work

Suitability for industry specific applications

Application

- Stationary use for handling devices and vacuum clamping devices
- Mobile vacuum unit with oil-lubricated vacuum pump and reservoir
- Audible and optical monitoring of the system vacuum

Design

- Oil-lubricated vacuum pump (1), motor protection with main switch (2) and CEE plug (3)
- Base housing (4) with reservoir (5), integrated non-return valve and vacuum gauge (6), optional wheels for mobile use
- Vacuum connection incl. solids filter (7) to prevent dirt from entering the reservoir and ball valve (8)

Vacuum Units VH-OG Start

Suction rate 10, 21, 40, 63 and 100 m³/h

Ordering data Vacuum Units VH-OG Start

Type	Part no.
VH-OG Start 10 10	10.01.55.00013
VH-OG Start 20 30	10.01.55.00014
VH-OG Start 40 50	10.01.55.00015
VH-OG Start 63 100	10.01.55.00016
VH-OG Start 100 100	10.01.55.00017